



Lagging Thermowells Standard (SL) and Heavy Duty (HL)


Thermowell flats are extended to allow accessibility through tank or pipe insulation. Available in 260 bore for 1/4" diameter sensors and 385 bore for 3/8" diameter sensors.

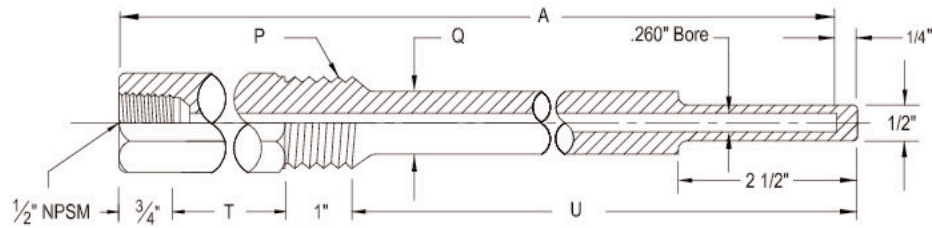


Standard Duty Lagging (SL), .260" Bore (Stepped)

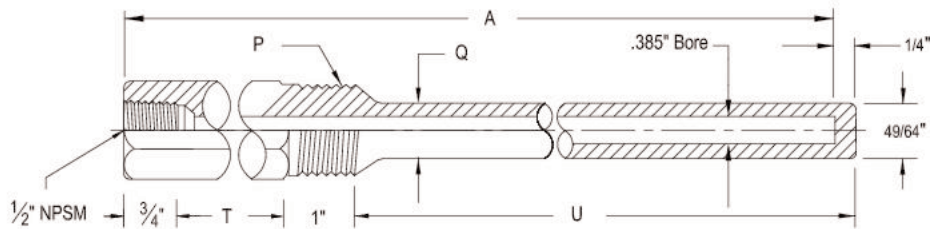

Standard Duty Lagging (SL), .385" Bore (Straight)

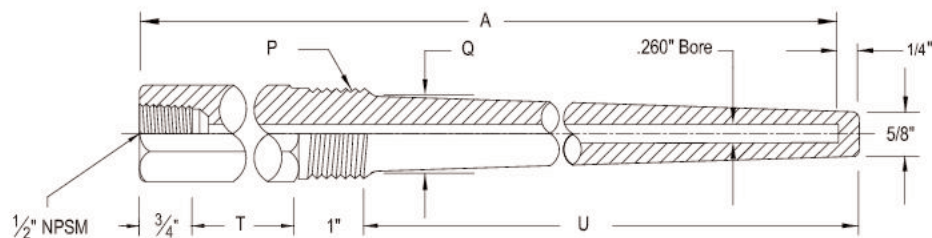

Heavy Duty Lagging (HL), .260" Bore (Tapered)

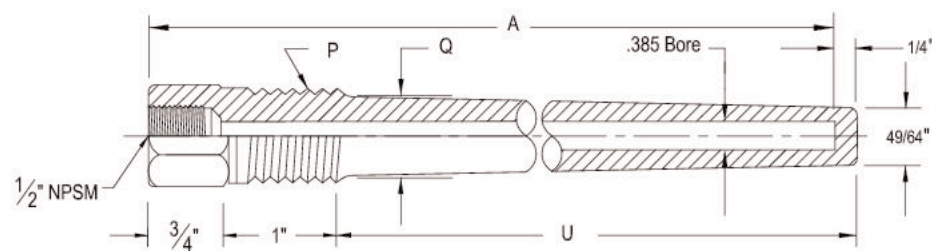

Heavy Duty Lagging (HL), .385" Bore (Tapered)

Process Connection	External Thread = "P"			
1/2	1/2" NPT Thread Size (N/A for "H" Heavy Duty)			
3/4	3/4" NPT Thread Size			
1	1" NPT Thread Size			
Model	Bore and Thermowell Type			
SL260	.260" Bore - Lagged Standard Duty			
SL385	.385" Bore - Lagged Standard Duty			
HL260	.260" Bore - Lagged Heavy Duty			
HL385	.385" Bore - Lagged Heavy Duty			
Insertion Length	Stem Length "A"	"T"	Insertion Length "U"	Shank Diameter "Q"
U2 1/2	6"	2	2 1/2"	For SL: 1/2" NPT: 5/8" (N/A for 1/2)
U4 1/2	9"	3	4 1/2"	For SL: 3/4" NPT: 3/4"
U7 1/2	12"	3	7 1/2"	For SL: 1" NPT: 7/8"
U10 1/2	15"	3	10 1/2"	For HL: 3/4" NPT: 7/8"
U13 1/2	18"	3	13 1/2"	For HL: 1" NPT: 11/16"
U19 1/2	24"	3	19 1/2"	
U22 1/2	27"	3	22 1/2"	
Other	Consult Factory			
Lagging	Lagging Dimension "T"			
T2	2" Standard for U 2 1/2			
T3	3" Standard for all others			
Other	Specify "T" ___			
Material	Thermowell Material			
316SS	AISI-316 SS - Standard			
304SS	AISI-304 SS			
Brass	Brass			
CS	Carbon Steel			
Monel	Monel 400			
Other	Consult Factory			

3/4 - SL260 - U4 1/2 - T3 - 316SS	Sample Model Number
- - - - -	Your Model Number

Specifications:

Process Connection "P":	1/2", 3/4" & 1" NPT are standard (1 1/4" and 1 1/2" are available).
Thermowell Style:	Specify style and bore.
Insertion Length "U":	From bottom of threads to tip of thermowell . Standard sizes listed - other sizes available.
Lagging Dimension "T"	Extension at wrench flats.
Materials:	Standard materials listed - others available. Refer to the Corrosive Service Guide in the Thermowell General Specifications to determine suitable material for specific application.
Instrument Connection Size:	1/2" NPSM internal thread is standard (1/2" or 3/4" NPT available).
Cap & Chain:	Brass cap and chain is available for keeping well bore clean when not in use. Add "CC" to the end of your model number to order this option.

